

INDION® 2250 H

Description

INDION 2250 H is a controlled particle size premium grade strong acid cation exchange resin containing sulphonic acid groups. It is based on cross-linked polystyrene and has a gel structure. The resin has high capacity and excellent kinetics.

Applications

INDION 2250 H is used in coflow and counter flow modes as a first stage in demineralising for the removal of cations. INDION 2250 H can be used with INDION GS 3000 Cl in mixed bed and condensate polishing units.

Characteristics

Appearance	:	Golden yellow to brown beads
Matrix	:	Styrene divinylbenzene copolymer
Functional Group	:	Sulphonic acid
Ionic form as supplied	:	Hydrogen
Total exchange capacity	:	1.8 meq/ml, minimum
Moisture holding capacity	:	49 - 55 %
Shipping weight *	:	780 kg/m ³ , approximately
Uniformity co-efficient	:	1.2, maximum
Effective size	:	0.50 to 0.65 mm
Fine content (< 0.42 mm)	:	0.5%, maximum
Volume change	:	Na to H, 8% approximately

Suggested operating conditions

Maximum operating temperature	:	120°C
Operating pH range	:	0 - 14
Minimum bed Depth	:	0.8 m
Service flow rate	:	8 - 48 BV/hr
Maximum velocity	:	60 m/hr

Regeneration



Regenerant	:	HCl		H ₂ SO ₄	
		Coflow	CCR	Coflow	CCR
Flow rate (bv/hr)	:	3 - 18	3 - 18	3 - 18	3 - 18
Regeneration level (Kg/m ³)	:	40 - 160	40 - 200	40 - 160	40 - 200
Concentration (%)	:	4 - 5	2.5 - 5	1.5 - 5	1.5 - 5
Contact time (minutes, minimum)	:	15	20	20 - 50	20
Slow rinse	:	2 bv at regeneration flow rate			
Fast rinse	:	1 - 3 bv at service flow rate			

* Weight of resin, as supplied, occupying 1 m³ in a unit after backwashing and draining.
1 bv (bed volume) = 1 m³ fluid/m³ of resin

Packing

HDPE Lined bags 25/ 50 lts
 Super sack 1000 lts
 Super sack 35 cft

LDPE bags 1 cft / 25 lts
 MS drums with liner bags 180 lts
 Fiber drums with liner bags 7 cft

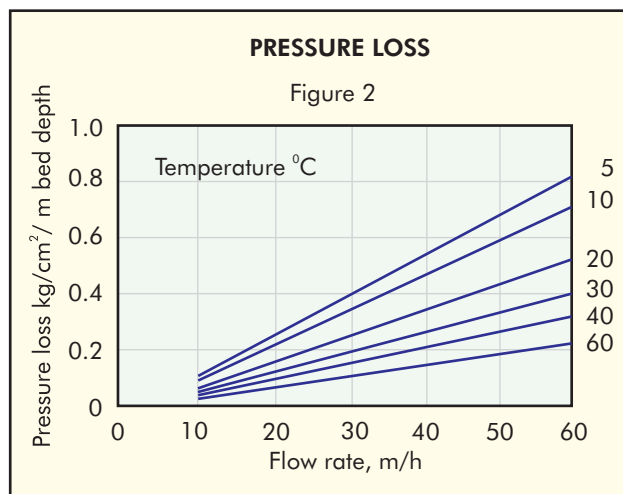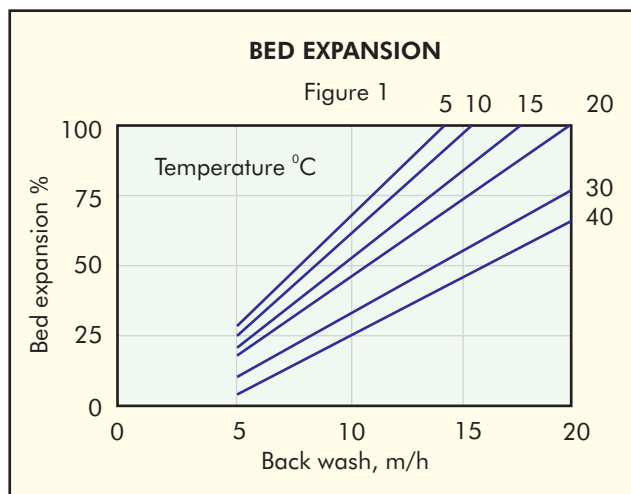

INDION range of Ion Exchange resins are produced in a state-of-the-art ISO 9001 and ISO 14001 certified manufacturing facilities at Ankleshwar, in the state of Gujarat in India.

To the best of our knowledge the information contained in this publication is accurate. Ion Exchange (India) Ltd. maintains a policy of continuous development and reserves the right to amend the information given herein without notice.

INDION is the registered trademark of Ion Exchange (India) Ltd.



CORPORATE OFFICE

Ion House, Dr. E. Moses Road, Mahalaxmi, Mumbai 400 011
 Tel: 022-3989 0909 Fax: 022-2493 8737
 E-mail: ieil@ionexchange.co.in

INTERNATIONAL DIVISION

R-14, T.T.C MIDC, Thane-Belapur Road, Rabale, Navi Mumbai 400 701
 Tel: 022-3989 0909/3047 2400 Fax: 022-2769 7918
 E-mail: rabcrointl@ionexchange.co.in; export.sales@ionexchange.co.in

REGIONAL OFFICES

- Chennai - Tel: 044-3989 0909/3910 2900 Fax: 044-2815 3361
 E-mail: checro@ionexchange.co.in
- Delhi - Tel: 011-3989 0909/3054 3200 Fax: 011-2577 4837
 E-mail: delcro@ionexchange.co.in
- Kolkata - Tel: 033-3989 0909/3043 3400 Fax: 033-2400 4345
 E-mail: calcro@ionexchange.co.in
- Vashi - Tel: 022-3989 0909/3913 2300 Fax: 022-2788 9839
 E-mail: mumcro@ionexchange.co.in

BRANCH OFFICES

- Bengaluru - Tel: 080-2204 2888
 E-mail: bngcro@ionexchange.co.in
- Bhubaneswar - Tel: 0674-326 9525
 E-mail: bbsr@ionexchange.co.in
- Chandigarh - Tel: 0172-274 5011 Fax: 0172-274 4594
 E-mail: delcro@ionexchange.co.in
- Hyderabad - Tel: 040-3066 3101/02/03 Fax: 040-3066 3104
 E-mail: hydcro@ionexchange.co.in
- Lucknow - Tel: 0522-301 3401/02 Fax: 0522-301 3401
 E-mail: luk.general@ionexchange.co.in
- Vadodara - Tel: 0265-302 7489/90 Fax: 0265-239 8508
 E-mail: brdcro@ionexchange.co.in
- Visakhapatnam - Tel: 0891-324 6253
 E-mail: sales.vizag@ionexchange.co.in

FACTORIES : Ankleshwar • Hosur • Patancheru • Rabale • Verna
ALL INDIA SERVICE AND DEALER NETWORK

Visit us at : www.ionindia.com